
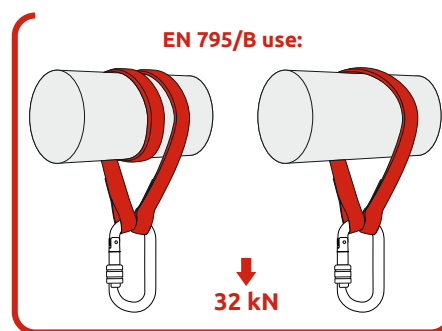


Affordable 27 mm polyester tubular webbing lanyards with open loop attachment points on both ends. No shock absorber. Certified for positioning use or as anchors only. Strength 22 kN.

- 2030050F** SINGLE 50 cm
- 2030100F** SINGLE 100 cm
- 2030150F** SINGLE 150 cm
- 2030200F** SINGLE 200 cm

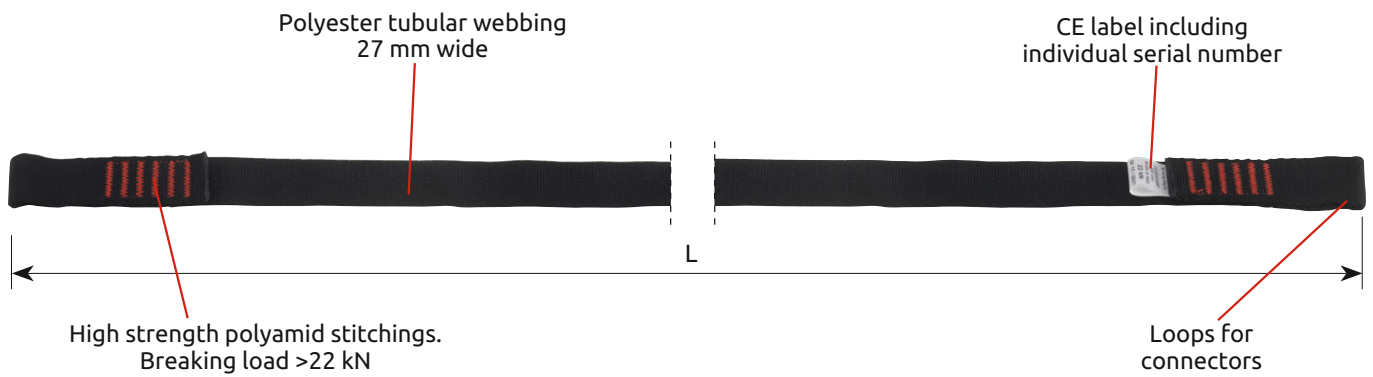

Ref.	Product name	Weight		CE	
		g	oz	EN 354	EN 795/B
2030050F	WEBBING LANYARD SINGLE 50 cm	55	1.9	•	•
2030100F	WEBBING LANYARD SINGLE 100 cm	90	3.2	•	•
2030150F	WEBBING LANYARD SINGLE 150 cm	120	4.2	•	•
2030200F	WEBBING LANYARD SINGLE 200 cm	155	5.5	•	•